

Product information

AVOL STREICHERT s_WUCHT 5W-30




Description:

Fully synthetic latest generation low-viscosity motor oil. Reduces fuel consumption in one of the toughest consumption tests in Europe (CEC-L-54-T-96/MB M 111) by more than 3% as compared with the specified reference oil. The innovative additive technology minimizes low-speed pre-ignition (LSPI) and thereby ensures a longer engine life.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA C2, A7/B7
API SP
ILSAC GF-6A
JASO DL-1
BMW Longlife-12 FE
GM Dexos1 Gen 3
Fiat 9.55535-CR1
Ford WSS-M2C934-B
Mazda Service Fill
STJLR.03.5005

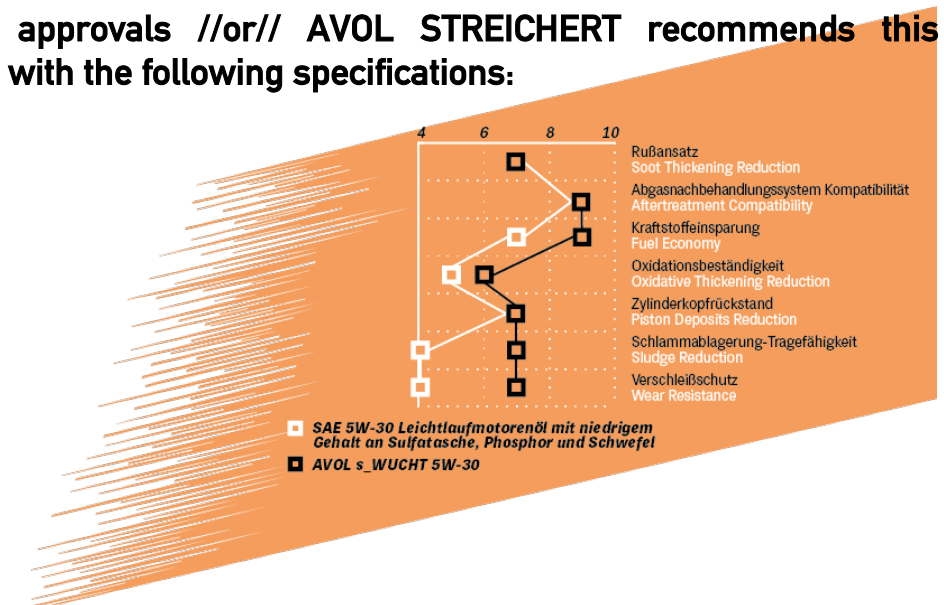

Technical data:

SAE class (engine oils)
Density at 20°C
Viscosity at 40°C
Viscosity at 100°C
Viscosity index
Pour point
Flash point
Total base number
Sulfate ash

5W-30 SAE J300
0.848 g/ml EN ISO 3675
58.9 mm²/s EN ISO 3104
10.7 mm²/s EN ISO 3104
175 ISO 2909
-42°C ISO 3016
233°C EN ISO 2592
6.1 mg KOH/g ASTM D4739
0.5 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.