

Product information AVOL STREICHERT FRACHT_3 15W-40




Description:

Mineral motor oil. Specially designed for high-load commercial vehicle engines in compliance with the Euro III (Euro IV and Euro II, US 2002) emissions standard. Also suitable for mixed fleets. Provides ideal oil pressure and a stable lubricating film even under critical conditions. Enables maximum oil change intervals. Tested safe with catalytic converters and turbochargers.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA E7-16
ACEA A3/B4-16
API CI-4/CF/SL
Global DHD-1
JASO DH-1
Allison C4
Caterpillar ECF-1a, ECF-2
Cummins CES 20076/20077/20078
Detroit Diesel 93K215
Deutz DQC III-18
John Deere JDQ 78A
Mack EO-N, EO-M Plus
MAN M 3275-1
MB 228.3, 229.1
MTU Typ 2
Renault Trucks RLD/RLD-2
Scania LDF-2
Volvo VDS-3

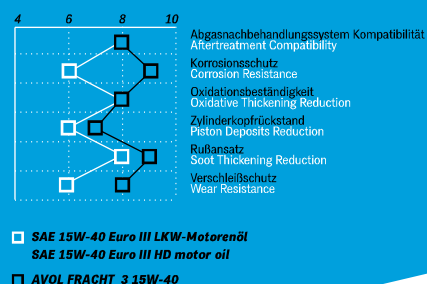

Technical data:

SAE class (engine oils)	15W-40 SAE J300
Density at 20°C	0.878 g/ml EN ISO 3675
Viscosity at 40°C	101.1 mm ² /s EN ISO 3104
Viscosity at 100°C	14.7 mm ² /s EN ISO 3104
Viscosity index	151 ISO 2909
Pour point	-32°C ISO 3016
Flash point	227°C EN ISO 2592
Total base number	10.5 mg KOH/g ASTM D 2896
Sulfate ash	1.25 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.