

Product information

AVOL STREICHERT FRACHT_4 10W-40




Description:

Fully synthetic motor oil. Specially designed for high-load commercial vehicle engines in compliance with the Euro IV, Euro V (Euro III and Euro II) emissions standard. Exceeds the highest test requirements demanded by renowned manufacturers. Provides ideal oil pressure and a stable lubricating film even under critical conditions. Enables maximum oil change intervals.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA E4/E7-16
API CI-4/CF
Global DHD-1
JASO DH-1
Caterpillar ECF-1a
Cummins CES 20077/20078
Scania LDF-3
DAF HP2, Extended Drain
Detroit Diesel 93K215
Deutz DQC IV-10, III-18
Mack EO-N, EO-M Plus
MAN M 3277, M 3377
MB 228.5
MTU Typ 3
Renault Trucks RLD-2/RXD
Volvo VDS-3

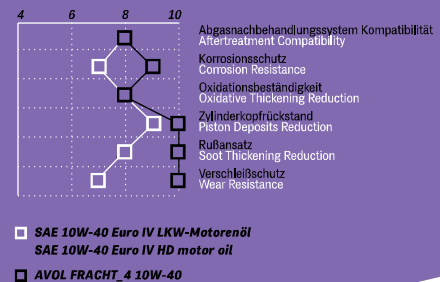

Technical data:

SAE class (engine oils)	10W-40 SAE J300
Density at 20°C	0.858 g/ml EN ISO 3675
Viscosity at 40°C	94.3 mm ² /s EN ISO 3104
Viscosity at 100°C	14.5 mm ² /s EN ISO 3104
Viscosity index	160 ISO 2909
Pour point	-39°C ISO 3016
Flash point	232°C EN ISO 2592
Total base number	12.5 mg KOH/g ASTM D 2896
Sulfate ash	1.5 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.