

Product information AVOL STREICHERT FRACHT_5 10W-40




Description:

Fully synthetic motor oil. Specially designed for high-load commercial vehicle engines in compliance with the Euro V (Euro VI and Euro IV) emissions standard with exhaust gas aftertreatment system and soot particulate filter (DPF/CRT/SCR/EGR). Guarantees an outstanding wear protection as well as a high lubricating film stability under all operating conditions. The excellent shear stability and stability to aging allow for long oil change intervals.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA E6/E9/E4/E7-16
API CK-4/CJ-4/CI-4
JASO DH-2
Caterpillar ECF-3
Cummins CES 20086/20081
DAF Extended Drain
Detroit Diesel 93K222, 93K218
Deutz DQC IV-18 LA
Iveco 18-1804 TLS E9
Mack EOS-4.5, EO-0 Premium Plus
MAN M 3575, M 3477, M 3271-1
MB 228.51/228.5
MTU Typ 3.1
Renault Trucks RLD-4/RLD-3/RXD/RGD
Volvo VDS-4.5, VDS-4, VDS-3, CNG
Scania Low Ash

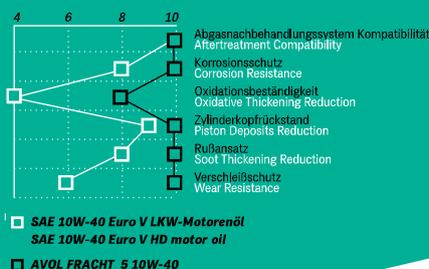

Technical data:

SAE class (engine oils)	10W-40 SAE J300
Density at 20°C	0.850 g/ml EN ISO 3675
Viscosity at 40°C	96.0 mm ² /s EN ISO 3104
Viscosity at 100°C	14.7 mm ² /s EN ISO 3104
Viscosity index	160 ISO 2909
Pour point	-40°C ISO 3016
Flash point	242°C EN ISO 2592
Total base number	10.5 mg KOH/g ASTM D 2896
Sulfate ash	0.9 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.