

Product information

AVOL STREICHERT FRACHT_5 15W-40




Description:

Mineral motor oil "Middle SAPS". Specially designed for high-load commercial vehicle engines in compliance with the Euro VI (Euro V, Euro IV, US 2007) emissions standard with exhaust gas aftertreatment system and soot particulate filter (DPF/CRT/SCR/EGR). Guarantees an outstanding wear protection as well as a high lubricating film stability under all operating conditions. The excellent shear stability and stability to aging allow for long oil change intervals.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA E9/E7-16
API CK-4/CJ-4/CI-4/SN
Global DHD-1
JASO DH-2
Allison TES-439
Caterpillar ECF-3, ECF-2
Cummins CES 20086/20081
Detroit Diesel 93K222, 93K218
Deutz DQC III-10 LA
Ford WSS-M2C171-F1
Mack EOS-4.5, EO-O Premium Plus
MAN M 3575, M 3275-1
MB 228.31
MTU Typ 2.1
Renault Trucks RLD-3
Volvo VDS-4.5, VDS-4

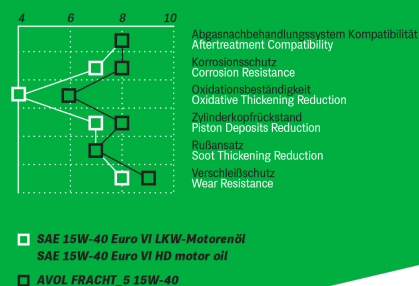

Technical data:

SAE class (engine oils)	15W-40 SAE J300
Density at 20°C	0.880 g/ml EN ISO 3675
Viscosity at 40°C	108.5 mm ² /s EN ISO 3104
Viscosity at 100°C	14.9 mm ² /s EN ISO 3104
Viscosity index	143 ISO 2909
Pour point	-34°C ISO 3016
Flash point	235°C EN ISO 2592
Total base number	9.7 mg KOH/g ASTM D 2896
Sulfate ash	0.9 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.