

Product information

AVOL STREICHERT s_PRIMA 0W-30




Description:

Fully synthetic fuel-saving year-round motor oil for outstanding performance and long engine life. Ideal for the latest diesel and gasoline engines with and without multi-valve technology and turbocharging as well as with and without charge air cooling and diesel particulate filter (DPF). Ensures better viscosity, reduced friction and lower volatility. Keeps sensitive engine components clean and provides excellent protection.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA C2-16
BMW Longlife-12 FE
Fiat 9.55535-DS1
Fiat 9.55535-GS1
Ford WSS-M2C950-A
Iveco 18-1811 Classe SC1 LV
PSA B71 2312
STJLR.03.5007

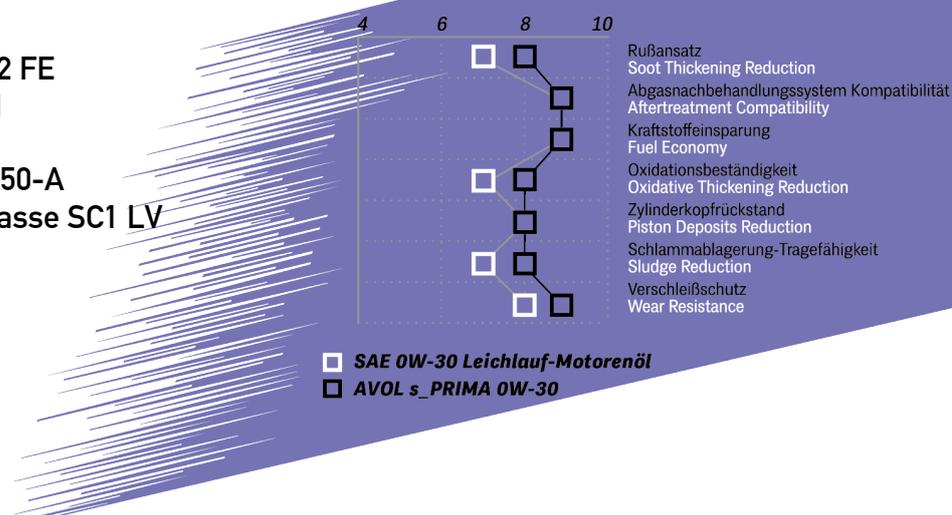

Technical data:

SAE class (engine oils)	0W-30 SAE J300
Density at 20°C	0.838 g/ml EN ISO 3675
Viscosity at 40°C	54.1 mm ² /s EN ISO 3104
Viscosity at 100°C	10.0 mm ² /s EN ISO 3104
Viscosity index	175 ISO 2909
Pour point	-51°C ISO 3016
Flash point	230°C EN ISO 2592
Total base number	7.7 mg KOH/g ASTM D 2896
Sulfate ash	0.7 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.