

Product information

AVOL STREICHERT s_RASCH 5W-40




Description:

Fully synthetic motor oil. Guarantees maximum performance even with long oil-change intervals. Provides the ideal oil pressure under all operating conditions. Fast cold-start oiling provides excellent engine wear protection during the start and warm-up phase.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA A3/B4-16
API SN/CF
BMW Longlife-01
Chrysler MS-10725
Chrysler MS-10850
Fiat 9.55535-H2/M2/N2/Z2
GM-LL-A-025 (B-040-2095)
GM-LL-B-025 (B-040-2098)
MB 229.3
Porsche A40
PSA B71 2294
PSA B71 2296
Renault RN0700/0710
VW 502.00/505.00

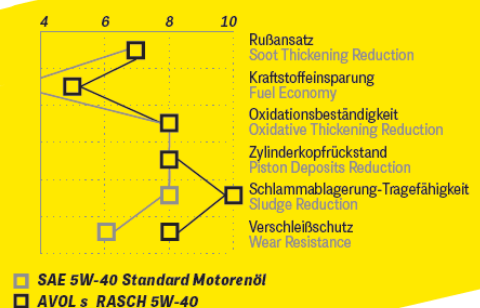

Technical data:

SAE class (engine oils)	5W-40 SAE J300
Density at 20°C	0.855 g/ml EN ISO 3675
Viscosity at 40°C	86.6 mm²/s EN ISO 3104
Viscosity at 100°C	14.9 mm²/s EN ISO 3104
Viscosity index	181 ISO 2909
Pour point	-47°C ISO 3016
Flash point	236°C EN ISO 2592
Total base number	10.0 mg KOH/g ASTM D 2896
Sulfate ash	1.0 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.