

Product information

AVOL STREICHERT s_WERTVOLL 5W-40




Description:

Fully synthetic motor oil with extremely high performance reserves. With outstanding wear-protection formula for pump-jet engines. Secures the functional performance of the diesel particulate filter and ensures the longest possible service life. Guarantees maximum performance even with long oil-change intervals.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA C3-16
API SN/CF
BMW Longlife-04
Fiat 9.55535-H2/M2/S2
Ford WSS-M2C917-A
GM dexos2
MB 229.51/229.31
Porsche A40
Renault RN0700/0710
VW 502.00/505.00
VW 505.01

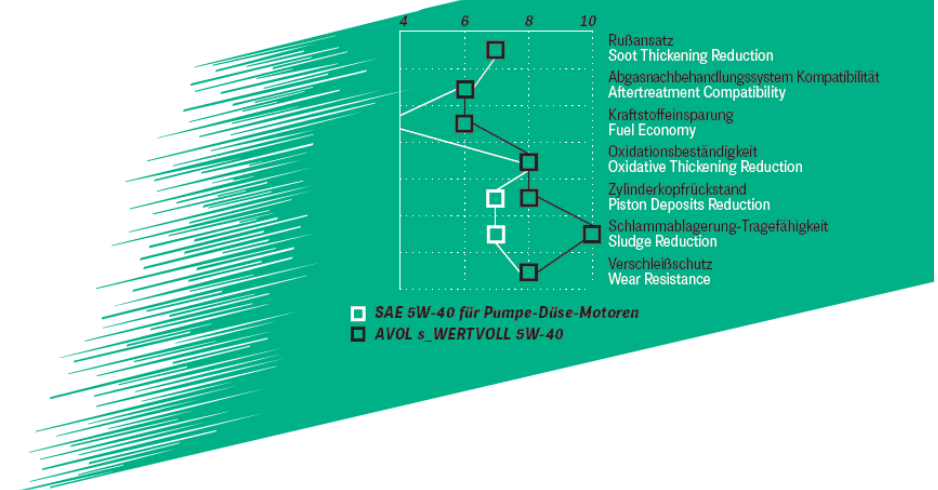

Technical data:

SAE class (engine oils)
Density at 20°C
Viscosity at 40°C
Viscosity at 100°C
Viscosity index
Pour point
Flash point
Total base number
Sulfate ash

5W-40 SAE J300
0.853 g/ml EN ISO 3675
83.7 mm²/s EN ISO 3104
14.2 mm²/s EN ISO 3104
176 ISO 2909
-41°C ISO 3016
234°C EN ISO 2592
7.5 mg KOH/g ASTM D 2896
0.7 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.