

Product information

AVOL STREICHERT s_PUR 0W-40




Description:

Fully synthetic motor oil is developed to suit the needs of some of the highest performing engines. Exceeds the strictest test requirements demanded by renowned manufacturers. Secures the functional performance of the gasoline and diesel particulate filters (GPF/DPF) and ensures the longest possible service life. AVOL STREICHERT recommends this product for BMW M, MB AMG, Audi RS, Lamborghini.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA C3
API SP, API CF
BMW Longlife-04
Fiat 9.55535-S2
GM dexos2
MB 226.5
MB 229.51/229.31
MB 229.52
Porsche C40
Renault RN17 RSA
VW 511.00

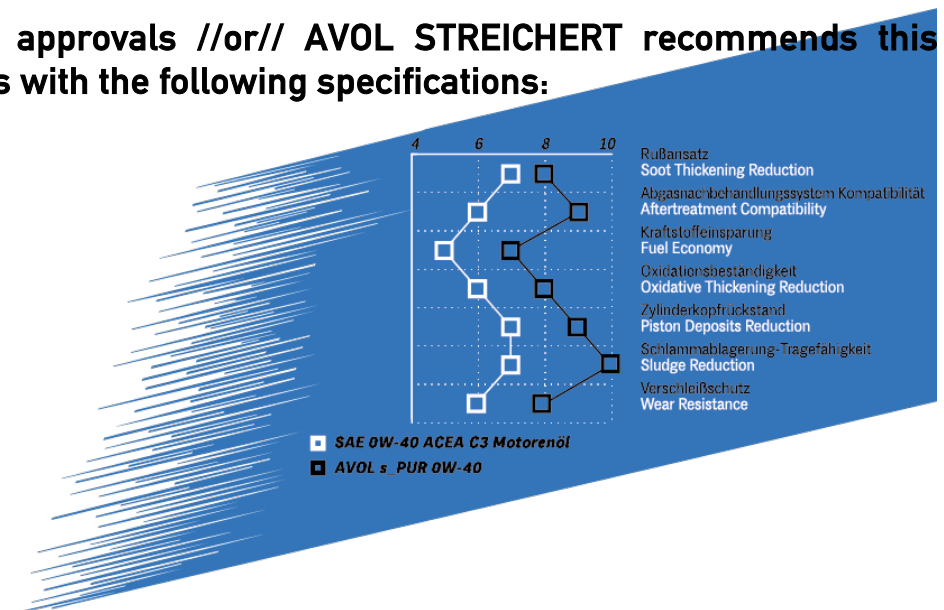

Technical data:

SAE class (engine oils)
Density at 20°C
Viscosity at 40°C
Viscosity at 100°C
Viscosity index
Pour point
Flash point
Total base number
Sulfate ash

0W-40 SAE J300
0.842 g/ml EN ISO 3675
76.7 mm²/s EN ISO 3104
14.1 mm²/s EN ISO 3104
191 ISO 2909
-54°C ISO 3016
235°C EN ISO 2592
8.8 mg KOH/g ASTM D 2896
0.9 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.